


# PSo6



Multifaster, 4 lines, size o6.

## Applications

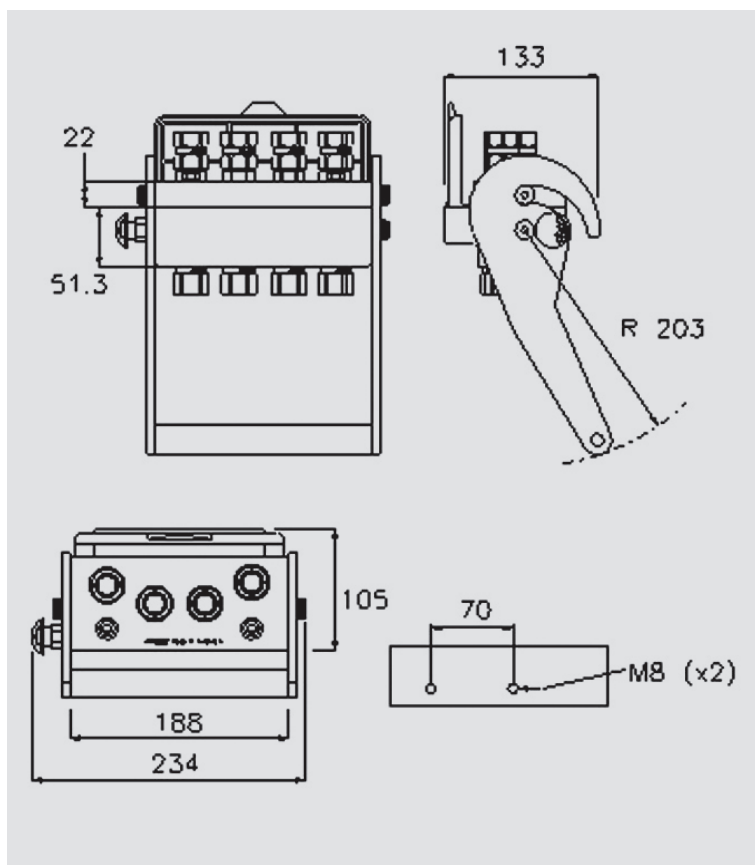

## Technical Specifications

| dash | Size<br>mm | inch | Working Pressure<br>(MPa) | Flow Rate<br>(l/min) | Spillage<br>(ml) | Burst pressure (MPa) |        |                  |
|------|------------|------|---------------------------|----------------------|------------------|----------------------|--------|------------------|
|      |            |      |                           |                      |                  | Male                 | Female | Male<br>+ Female |
| 06   | 10         | 3/8" | 25                        | 40                   | 0,008            | 100                  | 100    | 100              |

|                      |                         |                           |                  |
|----------------------|-------------------------|---------------------------|------------------|
| Material             | Aluminium; Steel        | Valve Type                | Flat             |
| Seals                | NBR; PUR                | Connection                | Lever            |
| Working temperatures | - 25 °C to 100 °C       | Disconnection             | Lever            |
| Surface treatment    | MATE 500 (CrIII); Paint | Connection Under Pressure | Allowed Residual |

## PSO6

| Size |    |      |         |                     | Thread Type |              |                        |                        |                | FIXED           |
|------|----|------|---------|---------------------|-------------|--------------|------------------------|------------------------|----------------|-----------------|
| dash | mm | inch | Housing | Number of Couplings | Thread Type | Standard     | Thread                 | Electrical Connector N | Connector Type | Part Number     |
| 06   | 10 | 3/8" | 4       | 4                   | 11/ SAE     | ISO 8434-3   | 13/16"-16 UN MALE ORFS |                        |                | 2PS06B-4-B F C  |
| 06   | 10 | 3/8" | 4       | 4                   | 02/ METRIC  | ISO 8434-1-L | M22x1,5 MALE 15L       |                        |                | 2PS06B-4-2/2F C |
| 06   | 10 | 3/8" | 4       | 4                   | 02/ METRIC  | ISO 8434-1-L | M22x1,5 MALE 15L       |                        |                | 2PS06B-4-2/22FC |
| 06   | 10 | 3/8" | 4       | 4                   | 11/ SAE     | ISO 8434-3   | 13/16"-16 UN MALE ORFS |                        |                | 2PS06A-4-B F C  |
| 06   | 10 | 3/8" | 4       | 4                   | F BSPP      | ISO 1179-1   | BSPP 3/8" FEMALE       |                        |                | 2PS06-4-38G F C |
| 06   | 10 | 3/8" | 4       | 4                   | F BSPP      | ISO 1179-1   | BSPP 1/2" FEMALE       |                        |                | 2PS06-4-12G F C |
| 06   | 10 | 3/8" | 4       | 4                   | 02/ METRIC  | ISO 8434-1-L | M22x1,5 MALE 15L       |                        |                | 2PS06-4-2/22F C |

| Size |    |      |         |                     | Thread Type |              |                             |                        |                | MOBILE          |
|------|----|------|---------|---------------------|-------------|--------------|-----------------------------|------------------------|----------------|-----------------|
| dash | mm | inch | Housing | Number of Couplings | Thread Type | Standard     | Thread                      | Electrical Connector N | Connector Type | Part Number     |
| 06   | 10 | 3/8" | 4       | 4                   | F BSPP      | ISO 1179-1   | BSPP 3/8" FEMALE            |                        |                | 2PS06-4-38G M C |
| 06   | 10 | 3/8" | 4       | 4                   | 20/ BSPP    | ISO 8434-6   | BSPP 1/2" FEMALE SWIVEL NUT |                        |                | 2PS06-4-20/12MC |
| 06   | 10 | 3/8" | 4       | 4                   | 16/ BSPP    | ISO 1179-1   | BSPP 3/8" FEMALE            |                        |                | 2PS06-4-16/3GMC |
| 06   | 10 | 3/8" | 4       | 4                   | 11/ SAE     | ISO 8434-3   | 13/16"-16 UN MALE ORFS      |                        |                | 2PS06-4-11/FSMC |
| 06   | 10 | 3/8" | 4       | 2                   | 02/ METRIC  | ISO 8434-1-L | M22x1,5 MALE 15L            |                        |                | 2PS06-2-2/22M C |
| 06   | 10 | 3/8" | 4       | 4                   | F BSPP      | ISO 1179-1   | BSPP 1/2" FEMALE            |                        |                | 2PS06-4-12G M C |
| 06   | 10 | 3/8" | 4       | 4                   | 02/ METRIC  | ISO 8434-1-L | M22x1,5 MALE 15L            |                        |                | 2PS06-4-2/22M C |

